

IDentity EVR



IDentity EVR

Ultra High Frequency 860 – 960 MHz
High-Performance, Multi-Protocol Reader

FEATURES

- Worldwide High-Performance reader platform.
- Awarded EPCglobal's Gen 2 hardware certification and interoperability marks and certified for Dense Reader Mode operation, the IDentity EVR was designed to address the complexities of worldwide business.
- A true network device offering easy enterprise integration and a rich applications environment that can be customized to needs of the end user.

Overview


Supporting the worldwide movement to Gen 2 technology, the IDentity EVR redefines the state-of-the-art for RFID readers. This powerful UHF reader system is designed for enterprise class applications and features best-in-class air interface performance. In addition, the robust, software-based architecture provides a rich application platform that addresses the needs of today's deployments and ensures that future features and capabilities can be added as RFID technology evolves in the future.

The IDentity EVR was designed from the ground up to support worldwide regulatory compliance from a single platform. The design provides optimal performance in North American, European and Asia-Pacific environments. The IDentity EVR offers a wide portfolio of configuration and enterprise management

tools that changes the paradigm of RFID system installation and management. For the end-user who needs a quick, out-of-the box solution, the IDentity EVR provides an intuitive installation wizard allowing the user to be able to begin reading tags within minutes.

Applications

With its exceptional read rate performance and 4 main monostatic antennas, the IDentity EVR easily integrates into most supply chain and closed loop UHF installations including dock door portals and conveyors systems but can also be used for applications including forklifts, point-of-sale, access control and many others.

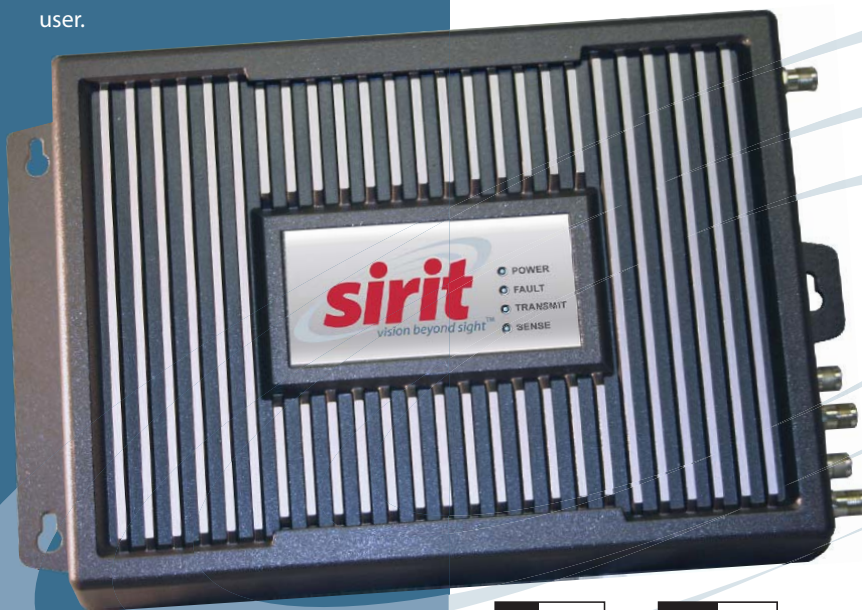

950110126000000247



950110126000000445

Identity EVR

High-Performance, Multi-Protocol Reader



Operating Characteristics

Management Features:	Rich array of diagnostic and statistical reporting tools, user-configurable alarms, and a host of management features based on industry standard protocols. Allows seamless integration into existing IT infrastructures.
User Applications:	Java-based application framework that can be used to extend the reader capability, especially for complex enterprise requirements. Middleware and custom application solutions built for edge devices can also be hosted in the reader.
Air Interface:	High performance radio and modem subsystems employing sophisticated DSP technology and advanced singulation algorithms that optimize read rates in a wide range of end-user applications.
Adaptive Noise Features:	Intelligent algorithms within the Identity EVR automatically enable the modem to adapt to the instantaneous noise and interference level, thus optimizing air interface performance and robustness for a wide range of deployment scenarios.
Upgradeability:	Upgradeable firmware permits forward compatibility for future protocols.

Specifications

Frequency:	UHF 860 MHz to 960 MHz
Supported Transponders:	Full support of mandatory and optional features (including optional user memory) of EPCGlobal Class 1 Generation 2 and ISO18000-6C. Also supports ISO 18000-6B, and Ucode 1.19 with future protocols supported through firmware updates.
Operating Modes:	Single Interrogator Multiple Interrogator Dense Interrogator
Communications:	10/100 Ethernet Port Serial Port EIA/TIA-232-F 115 kBaud with hardware handshaking (RTS/CTS), DCE
GPIO:	Digital Input/Output Port 4 – optically coupled inputs, 25V max. Controllable input reference 4 – open-collector outputs, 3-40V, 100mA max, 1W max
RF Power:	+30 dBm, conducted (FCC)
Input Power:	12 to 24 Vdc (13W at idle; 34W typical (40W max) at max RF Power) 85 to 265 Vac, 50-60 Hz (optional)
Antenna Connection:	4 - RP-TNC connections (reverse polarity) Fifth RP-TNC connection for LBT functionality
LED Indicators:	Sense, Transmit, Fault and Power
Upgradeable Firmware:	Yes
Operating Temperature:	-20°C to 60°C (-7°F to 140°F)
Relative Humidity:	5 to 95%, non-condensing
Dimensions (LxWxD):	22.0 x 30.0 x 5.6 cm (8.66 x 11.81 x 2.20 in.)
Weight:	3.0 kg (6.5 lbs) `
Regulatory:	FCC Part 15, IC RSS-210, EN 300 220-3 v1.1.1, EN 301 489-1 v1.4.1, EN 301 489-3 v1.4.1, EN 302 208-2 v1.1.1, EN 50364:2001, EN 60950-1:2001, EN55022 (Class A), EN55024, EN61000-(3-2, 3-3), EN61000-(4-2, 4-3, 4-4, 4-6) and many other country standards through firmware updates.
Case Material:	Aluminum

About Sirit Inc.

Sirit Inc. (TSX: SI) is a leading provider of Radio Frequency Identification (RFID) reader technology to OEMs and solution providers worldwide. Harnessing the power of Sirit's enabling-RFID technology, customers are able to more rapidly bring high quality RFID solutions to the market with reduced initial engineering costs. Sirit's products are built on more than 13 years of RF domain expertise addressing multiple frequencies (LF/HF/UHF), multiple protocols and are compliant with global standards. Sirit's broad portfolio of products and capabilities are easily customized to address new and traditional RFID market applications including Supply Chain & Logistics, Cashless Payment, Access Control, Automatic Vehicle Identification, Inventory Control & Management, Asset Tracking and Product Authentication. For more information, visit www.sirit.com.

© 2007 Sirit Inc., all rights reserved. "Sirit", the Sirit Design, "RFID by Sirit", the RFID by Sirit Design and "vision beyond sight" are all trademarks of Sirit Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice. IN510_04-07 rev02

SIRIT - CANADA
372 Bay Street, Suite 1100
Toronto, ON M5H 2W9 Canada
Tel: 416.367.1897
Fax: 416.367.1435

SIRIT - USA
1321 Valwood Parkway, Suite 620
Carrollton, Texas 75006 USA
Tel: 972.243.7208
Fax: 972.243.8034

For more information,
contact sales toll free
at 1.866.338.9586

E-mail: sales@sirit.com

www.sirit.com



Products bearing the Gen 2 Hardware Compliance Certification Mark have been rigorously tested and comply with the EPCglobal standards.



Products bearing the Gen 2 Hardware Interoperability Certification Mark have been rigorously tested and comply with the EPCglobal standards to work with other compliance-certified tags, readers or printer/encoders.